

Door Contact Set

Door contacts can be connected to the iPower ACU Board products to indicate when a cabinet door is opened or closed.

Alerts are sent as either SNMP Traps or Emails to let the customer know when their Cabinet doors have been opened.

Simply position the Door Contact set and plug directly into the PDU.




SPECIFICATION

Contact Form / Style	Normally Open
Switching Distance	8.0mm Min
Operating Temperature	-40°C +105°C
Case Material	Glass Filled Nylon
Cable Length	3.0 Mtr

PART NUMBER

9901-IPT-500-800

This image shows how the door status is shown within the Web GUI.

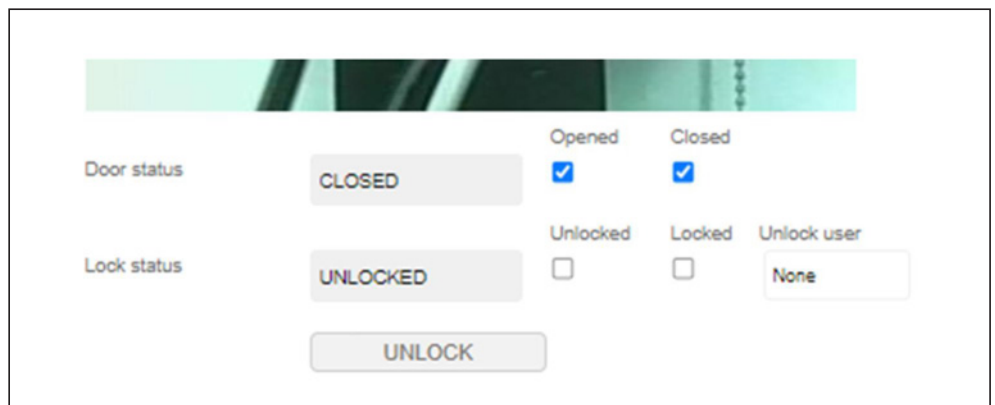

Web GUI Screen Shot



Material recycling.
Packing materials are recyclable.
Please dispose of appropriately.

To EN62368-1:2020 Intertek – 10553241



Manufactured
in the UK

0800 246 1899

technical@ipdu.co.uk

www.ipdu.co.uk